

## V2.5 G19 Globe



# ALTLED® Asteria Series Specification Sheet

## Product Introduction

ASTERIA is a minor planet that orbits the Sun, and also considered in the Greek Mythology as the Amazon that defeat the all mighty Heracles. ALT's ASTERIA can be presented as a strong, smart and efficient light bulb. ALT's Asteria G19 Globe was originally designed to resemble and be used of a traditional light bulb. When matched up with a traditional light bulb, which is much more efficient in terms of LED benefits, including safety, energy-saving, and environment friendliness.

Made with 100% aluminum heat fins and designed to ensure outstanding heat dissipation, perfectly fits various environments with a 180 degree beam angle. In addition, since it does not contain any glass tubes to break, and made with rigidly supported internal parts, it is perfectly made to resist impact and vibration. Asteria G19 Globe series is ideal to bright up small and middle sized rooms, offices, and houses. Mostly it should be considered of installing with table lamp, wall lamp, floor lamp or even artificial lamp, and is available in True/Natural/Warm White, Red, Green, and Blue colour.

## Certificates



## Features

- ✓ Fits various environments with a 180 degree beam angle.
- ✓ Elegant, rich and long-lasting lighting output ideal for Interior design.
- ✓ High density aluminum increase heat dissipation.
- ✓ Up to 90% energy saving compared to standard halogen lamp.

## Application

- ✓ Shop Lighting
- ✓ Commercial Lighting
- ✓ Boutique Lighting
- ✓ Illumination Lighting
- ✓ Hotel Lighting



## Specifications

Item	Specification	Details		
Output	Beam Angle	180°		
	Colour Range	TW / NW / WW		
	Lumen Maintenance	30,000+ hours		
Electrical	Input Voltage	12V AC/DC or 100 ~ 240V AC		
	Power Consumption	5, 7 Watts		
Physical	Bases	<ul style="list-style-type: none"> <li>· GX 5.3 / GU 5.3</li> <li>· E26 / 24 (US)</li> <li>· E26 / 27 (EURO)</li> <li>· GU10 / GZ 10</li> <li>· EZ10</li> <li>· E11</li> <li>· E12</li> <li>· E14</li> <li>· E17</li> <li>· B22D</li> <li>· BA15D</li> <li>· BA15S</li> </ul>		
		Weight	0.88 ~ 1.69 oz. (25 ~ 48 g)	
		Lens	Optics PMMA	
		Operating Temperature	-4° F to 104° F (-20°C to 40°C)	
		Humidity	0 – 95%, non-condensing	
		Certification and Safety	Certifications	UL, CE, FCC, TÜV, LVD, RoHS, Laser Testing, C-Tick, REACH
			Environment	Not for use in totally enclosed fixtures Suitable for damp location
			Warranty	3 years
		<b>Two Million Worldwide Product Liability Insurance.</b>		

## Chipset Luminous Flux

Chipsets		EPISTAR	
Power Consumption		5 W	7W
Beam Angle		10%	180°
True White	CRI 75	400lm	460lm
	CRI 90	320lm	380lm
Natural White	CRI 75	380lm	440lm
	CRI 90	300lm	360lm
Warm White	CRI 75	310lm	370lm
	CRI 90	250lm	270lm


※All Chipset Luminous Flux Data are indicated in max values.

## Optical Characteristics

Dominant Wavelength (nm) or Colour Temperature (K)

Correlated Colour Temperature	Min.	Typ.	Max.
True White	4500K	6500K	10000K
Natural White	4100K	4300K	4500K
Warm White	2540K	3100K	3500K

## Illuminance at Distance

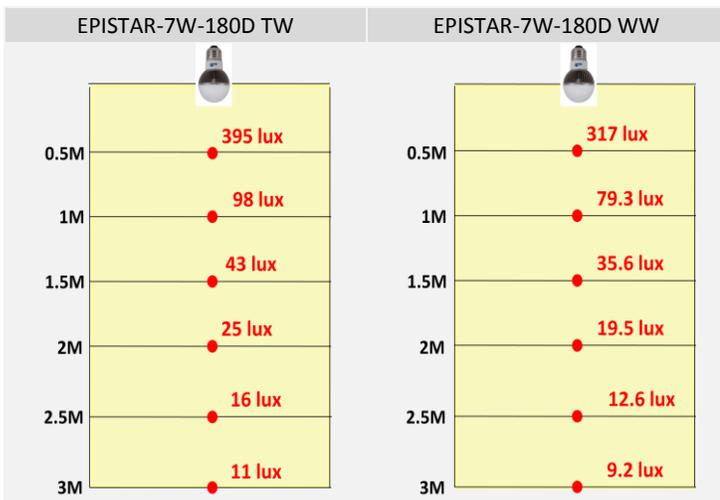

## Mechanical Dimensions

