

AITLED[®] ASteria Series

Specification Sheet

Internal Transformer

Product Introduction

ASTERIA is a minor planet that orbits the Sun, and also considered in the Greek Mythology as the Amazon that defeat the all mighty Heracles. ALT's ASTERIA can be presented as a strong, smart and efficient light bulb. ALT's Asteria MR16 series guarantees the outstanding efficiency and quality of High Power Products. All these make our MR16 products ideal for general business and decorative lighting purpose, including shop Lighting, Hotel

lighting, and Commercial Applications. You can simply install it within the showcase of the boutique, and add up bonus for the display. Also, Asteria series MR16 Dimmable can easily and smartly help you lessen energy consumption up to 90%, it will enhance your business profitability and help the environment to flourish. Asteria MR16 series certainly be the product to create a more beautiful and efficient world.

Certificates









Features

- ✓ Smooth dimming function fades from 100% to 0% light output without flicker.
- ✓ Elegant, rich and long-lasting lighting output ideal for Interior design.
- High density aluminum increase heat dissipation.
- ✓ Up to 90% energy saving compared to standard halogen lamp.

Application

- ✓ Shop Lighting
- ✓ Commercial Lighting
- ✓ Boutique Lighting
- ✓ Illumination Lighting
- ✓ Hotel Lighting



Specifications

Item	Specification	Details
Output	Beam Angle Colour Range Lumen Maintenance	15°, 25°, 38°, 45°, 72°, 120° TW / NW / WW / R / G / B 30,000+ hours
Electrical	Input Voltage Power Consumption	110V AC or 220V AC 7 Watts
Physical	Bases	• E26 / 24 (US) • E26 / 27 (EURO) • GU10 • E11 • E12 • E14 • E17 • B22D • BA15D
	Weight Lens	0.88 ~ 1.69 oz. (25 ~ 48 g) Optics PMMA
	Operating Temperature	-4° F to 104° F (-20°C to 40°C)
	Humidity Certifications	0 – 95%, non-condensing RoHS , Laser Testing
Certification and Safety	Environment	Not for use in totally enclosed fixtures Suitable for damp location
	Warranty	3 year
	Two Million Worldwide Product Liability Insurance.	

Chipset Luminous Flux

Chipsets	LUXEON Rebel		CREE XP-C
Power Consumption	7 W	7 W	7 W
LED Qty	4 pcs	2 pcs	4 pcs
CRI		80	
Beam Angle 10%	25° / 45°	38° / 72°	25°/120°
True White	520 lm	400 lm	520 lm
Natural White O	520 lm	400 lm	455 lm
Warm White	400 lm CRI 90 320 lm	250 lm CRI 90 200 lm	420 lm
Red	210 lm	190 lm	-
Green	520 lm	400 lm	-
Blue	160 lm	130 lm	-

Chipsets	EPISTAR
Power Consumption	7W
Beam Angle 10%	100° / 135°
True White O	CRI 98 330 lm
Warm White O	CRI 98 240 lm


All Chipset Luminous Flux Data are indicated in max values.

Optical Characteristics


Dominant Wavelength (nm) or Colour Temperature (K)

Correlated Colour Temperature	Min.	Тур.	Max.
True White	4500K	6500K	10000K
Natural White	3500K	4100K	4500K
Warm White	2540K	3100K	3500K
Red	620.5nm	627nm	645nm
Green	520nm	530nm	550nm
Blue	460nm	470nm	490nm

Illuminance at Distance

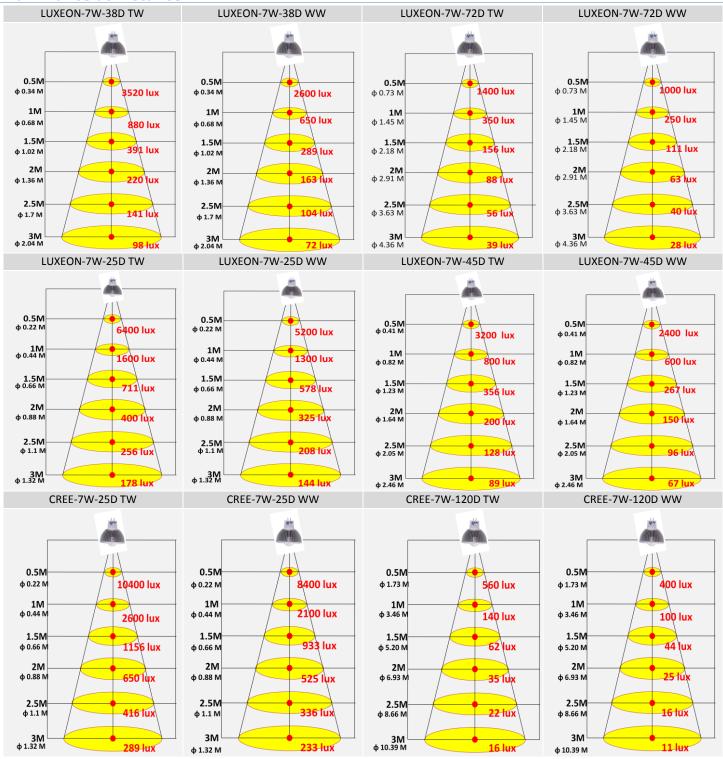

Mechanical Dimensions

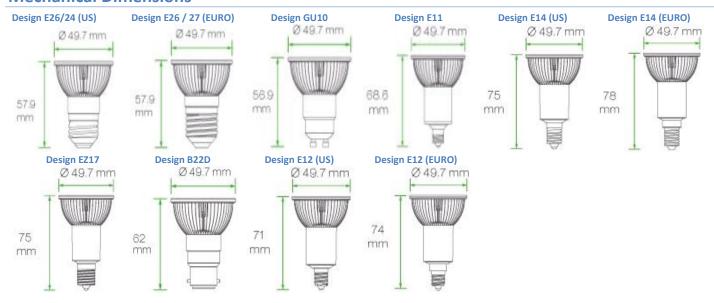

Compatible Dimmers List

Compatible Dimmers List			
100V~120V AC Types			
Brand	Туре	Max. Watts	
LUTRON	TGCL-153PH-LA	150W	
LUTRON	CTCL-153PDH-WH	600W	
LUTRON	DV-603PR-WH	600W	
LEVITON	IPL06	600W	
LEVITON	R60-6684-1IW	600W	
Toshiba	DG9042SN	400W	
Panasonic	WN575149	400W	

Compatible Dimmers List		
220V~240V	AC Types	
Brand	Туре	Max. Watts
CLIPSAL	LEADING EDGE 32E450LM	450W