V2.5 MR16 Dimmable





Specification Sheet

Internal Transformer

Product Introduction

ASTERIA is a minor planet that orbits the Sun, and also considered in the Greek Mythology as the Amazon that defeat the all mighty Heracles. ALT's ASTERIA can be presented as a strong, smart and efficient light bulb. ALT's Asteria MR16 series guarantees the outstanding efficiency and quality of High Power Products. All these make our MR16 products ideal for general business and decorative lighting purpose, including shop Lighting, Hotel

lighting, and Commercial Applications. You can simply install it within the showcase of the boutique, and add up bonus for the display. Also, Asteria series MR16 Dimmable can easily and smartly help you lessen energy consumption up to 90%, it will enhance your business profitability and help the environment to flourish. Asteria MR16 series certainly be the product to create a more beautiful and efficient world.

Certificates









Features

- ✓ Smooth dimming function fades from 100% to 0% light output without flicker.
- Elegant, rich and long-lasting lighting output ideal for Interior design.
- ✓ High density aluminum increase heat dissipation.
- ✓ Up to 90% energy saving compared to standard halogen lamp.

Application

- ✓ Shop Lighting
- ✓ Commercial Lighting
- ✓ Boutique Lighting
- ✓ Illumination Lighting
- ✓ Hotel Lighting



Specifications

<u> </u>		
Item	Specification	Details
Output	Beam Angle Colour Range Lumen Maintenance	60°, 90°, 120° TW / NW / WW 30,000+ hours
Electrical	Input Voltage Power Consumption	110V AC or 220V AC 7 Watts
Physical	Bases	• E26 / 24 (US) • E26 / 27 (EURO) • GU10 • E11 • E12 • E14 • E17 • B22D • BA15D
	Weight	0.88 ~ 1.69 oz. (25 ~ 48 g)
	Lens Operating Temperature	Optics PMMA -4° F to 104° F (-20°C to 40°C)
	Humidity	0 – 95%, non-condensing
Certification and Safety	Certifications	RoHS , Laser Testing
	Environment	Not for use in totally enclosed fixtures Suitable for damp location
	Warranty	3 year
	Two Million Worldwide Product Liability Insurance.	

Chipset Luminous Flux

Chipsets		EPISTAR	
Power Consumption		7W	
Beam Angle	10%	60° / 90° / 120°	
True White	0	CRI 75 400 lm CRI 90 330 lm	
Natural White	0	CRI 75 400 lm CRI 90 330 lm	
Warm White	0	CRI 75 320 lm CRI 90 240 lm	


XAll Chipset Luminous Flux Data are indicated in max values.

Optical Characteristics


Dominant Wavelength (nm) or Colour Temperature (K)

Correlated Colour Temperature	Min.	Тур.	Max.
True White	4500K	6500K	10000K
Natural White	4100K	4300K	4500K
Warm White	2540K	3100K	3500K

Illuminance at Distance

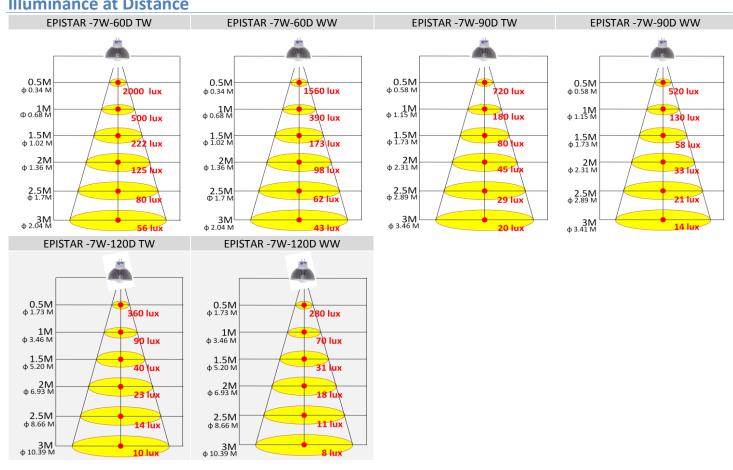

Mechanical Dimensions

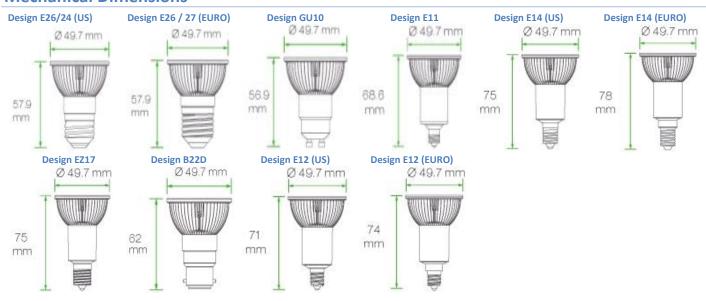

Compatible Dimmers List

Compatible Dimmers List					
100V~120V AC Types					
Brand	Туре	Max. Watts			
LUTRON	TGCL-153PH-LA	150W			
LUTRON	CTCL-153PDH-WH	600W			
LUTRON	DV-603PR-WH	600W			
LEVITON	IPL06	600W			
LEVITON	R60-6684-1IW	600W			
Toshiba	DG9042SN	400W			
Panasonic	WN575149	400W			

Compatible Dimmers List				
220V~240V AC Types				
Brand	Туре	Max. Watts		
CLIPSAL	LEADING EDGE	450W		
	32E450LM	430 00		

Fax +886-2-8226-9066 www.aeonlighting.com

