

## V3 A19 Bulb



# ALTLED® **Metis** Series

## Specification Sheet

### Product Introduction

Mother of Athena is regarded in the Greek Mythology as the goddess of arts and wisdom, METIS is also one of the largest asteroids in the galaxy. With a refinement of art and efficiency, ALT's METIS series is the perfect choice for those who are concerned about style and sophistication. Designed specifically for retail applications, ALT Metis series is ideal to better the world with its distinctive features. ALT Metis products are engineered and designed in such an aesthetic way, featuring with an unique physical design, and creating a blaze of the light within the beam. Moreover, like our Spotlight, A19 bulb and Chandeliers, ALT Metis can attain some particular lighting applications. The elegant of Metis is perfectly expressed via its well-designed shape.

### Certificates



### Features

- ✓ Fits various environments with a 180 degree beam angle.
- ✓ Elegant, rich and long-lasting lighting output ideal for Interior design.
- ✓ High density aluminum increase heat dissipation.
- ✓ Up to 90% energy saving compared to standard halogen lamp.

### Application

- ✓ Shop Lighting
- ✓ Commercial Lighting
- ✓ Boutique Lighting
- ✓ Illumination Lighting
- ✓ Hotel Lighting



## Specifications

Item	Specification	Details
Output	Beam Angle	180°
	Colour Range	TW / NW / WW
	Lumen Maintenance	30,000 hours
Electrical	Input Voltage	100 ~ 240V AC
	Power Consumption	5, 7 Watts
Physical	Bases	· E26 / 24 (US)
		· E26 / 27 (EURO)
		· E11
		· E12
		· E14
		· E17
	· B22D	
Weight	3.17 oz. ( 90 g )	
Lens	Optics PMMA	
Operating Temperature	-4° F to 104° F (-20°C to 40°C)	
Humidity	0 – 95%, non-condensing	
Certification and Safety	Certifications	ETL, CE, FCC, RoHS, Laser Testing, C-Tick, LVD
	Environment	Not for use in totally enclosed fixtures Suitable for damp location
	Warranty	3 years
	<b>Two Million Worldwide Product Liability Insurance.</b>	

## Lamp Luminous Flux

Chipsets	BRIDGELUX	
Power Consumption	5 W	7 W
Beam Angle	180°	
True White	○ CRI 65 315 lm	CRI 65 360 lm
Warm White	● CRI 82 210 lm	CRI 82 240 lm

Chipsets	BRIDGELUX SM4	
Power Consumption	7 W	
Beam Angle	10%	180°
True White	○ CRI 70 420 lm	
Warm White	● CRI 80 320 lm	

Chipsets	CREE XM-L	CREE MC-E
Power Consumption	7 W	
CRI	80	
Beam Angle	180°	
True White	○ 440 lm	420 lm
Nature White	● 360 lm	330 lm
Warm White	● 320 lm	300 lm

※All Lamp Luminous Flux Data are indicated in max values.

### BRIDGELUX LED Chips

Correlated Colour Temperature	Min.	Typ.	Max.
True White	4750K	5600K	7000K
Warm White	2850K	3000K	3700K

## Optical Characteristics


Dominant Wavelength (nm) or Colour Temperature (K)

CREE LED Chips

Correlated Colour Temperature	Min.	Typ.	Max.
True White	4500K	6500K	10000K
Natural White	3500K	4100K	4500K
Warm White	2540K	3100K	3500K

## Illuminance at Distance


BRIDGELUX-5W-180D TW	BRIDGELUX-5W-180D WW	BRIDGELUX-7W-180D TW	BRIDGELUX-7W-180D WW
----------------------	----------------------	----------------------	----------------------

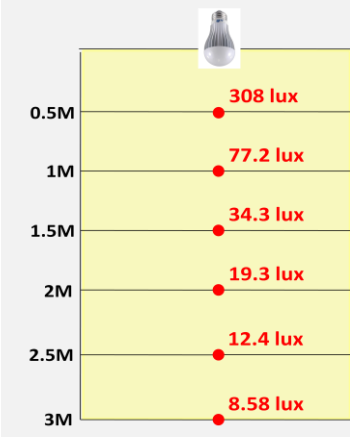




CREE MC-E-7W-180D TW



CREE MC-E-7W-180D WW

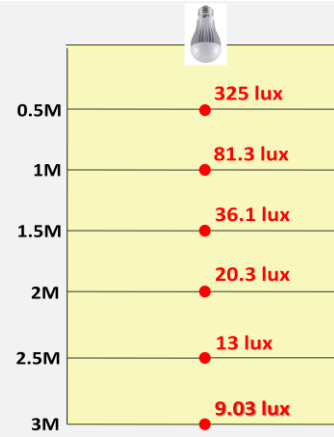

CREE XM-L-7W-180D WW

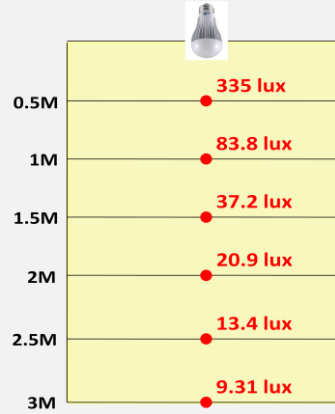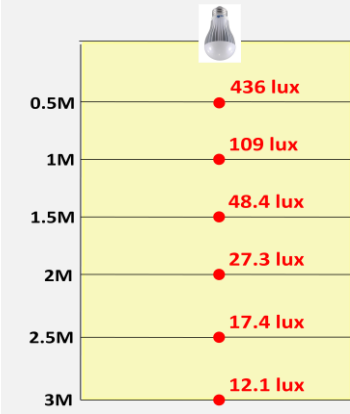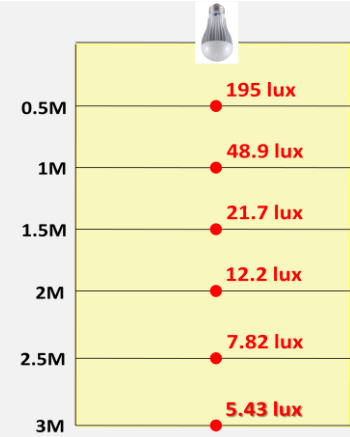

## Mechanical Dimensions

Design E26/24 (US)



Ø49.8 x 105 mm  
Design B22D

Design E26/27 (EURO)



Ø49.8 x 108 mm  
Design E12 (US)

Design E11




Ø49.8 x 99 mm  
Design E12 (EURO)

Design E17



Ø49.8 x 105 mm

Design E14 (US)



Ø 50 x 105 mm

Design E14 (EURO)



Ø 50 x 112 mm



Ø 49.8 x 104 mm



Ø 49.8 x 101 mm



Ø 49.8 x 104 mm