

PAR30



# ALTLED® Asteria Series

## Specification Sheet

### Product Introduction

ASTERIA is a minor planet that orbits the Sun, and also considered in the Greek Mythology as the Amazon that defeat the all mighty Heracles. ALT's ASTERIA can be presented as a strong, smart and efficient light bulb. ALT's Asteria PAR Series is the most efficient and brightest LED for general lighting solution in the market, and is indeed the first high power LED to achieve the requirements in a safe, durable, and resourceful way. Concededly it is perfect for brightening up wide areas, including your living room, lobbies in Hotels, and dining areas in restaurants. Living wisely it allows you to reduce a considerable amount of energy consumption and maintenance costs, and at the same time provide a beautiful, elegant atmosphere. Simple and easy to install, also guaranteed by our engineers to last up to 50,000 hours, Asteria PAR series are beautifully designed and will make a big difference in any ambient it is installed. More importantly, Asteria PAR Series has been certified by the most important safety certification organisations, such as UL, LASER, PSE, RoHS, CE and FCC. All these provide a relieved safety environment to where it's applied.

### Certificates



### Features

- ✓ Elegant, rich and long-lasting lighting output ideal for Interior design.
- ✓ High density aluminum increase heat dissipation.
- ✓ Up to 90% energy saving compared to standard halogen lamp.

### Application

- ✓ Shop Lighting
- ✓ Commercial Lighting
- ✓ Boutique Lighting
- ✓ Illumination Lighting
- ✓ Hotel Lighting



## Specifications

Item	Specification	Details
Output	Beam Angle	15°, 20°, 25°, 38°, 40°, 45°, 60°, 100°
	Colour Range	TW / NW / WW
	Lumen Maintenance	50,000 hours
Electrical	Input Voltage	100~277V AC 24V DC
	Power Factor	> 0.9
	Power Consumption	15, 20 Watts
Physical	Bases	<ul style="list-style-type: none"> <li>E26 / 24 (US)</li> <li>E26 / 27 (EURO)</li> </ul>
	Weight	14.10 oz. ( 400 g )
	Lens	Optics PMMA
	Operating Temperature	-4° F to 104° F (-20°C to 40°C) -85° F to 104° F (-65°C to 40°C) (Optional)
	Humidity	0 – 95%, non-condensing
Certification and Safety	Certifications	PSE, Laser Testing, RoHS, UL CE, FCC, REACH, LVD, C-Tick
	Environment	Not for use in totally enclosed fixtures Suitable for damp location
	Warranty	3 years
<b>Two Million Worldwide Product Liability Insurance.</b>		

## Optical Characteristics

Dominant Wavelength (nm) or Colour Temperature (K)

### CREE LED chips

Correlated Colour Temperature	Min.	Typ.	Max.
True White	4550K	6000K	10000K
Natural White	3250K	4000K	4750K
Warm White	2100K	3000K	3500K

### LUXEON LED chips

Correlated Colour Temperature	Min.	Typ.	Max.
True White	5000K	6000K	6500K
Natural White	3500K	4500K	5000K
Warm White	2700K	3000K	3500K

### BRIDGELUX LED chips

Correlated Colour Temperature	Min.	Typ.	Max.
True White	4750K	5600K	7000K
Natural White	3700K	4100K	4750K
Warm White	2850K	3000K	3700K

### EPISTAR LED chips

Correlated Colour Temperature	Min.	Typ.	Max.
True White	5000K	5500K	5700K
Warm White	2870K	3000K	3220K

## Lamp Luminous Flux

Chipsets		CREE XT-E	
Power Consumption		15W	20W
Beam Angle		50% 25° / 40° / 60° / 100° 60° / 100°	
True White	CRI 70	1250 lm	1550 lm
Natural White	CRI 80	1050 lm	1300 lm
Warm White	CRI 80	900 lm	1125 lm
	CRI 90	800 lm (2200K)	1000 lm (2200K)
		720 lm	900 lm

Chipsets		CREE XP-G		LUXEON Rebel ES	
Power Consumption		15W	20W	15W	20W
Beam Angle		50% 25°/60°/100° 60° / 100°		60° / 100°	
True White	CRI 80	1150 lm	1450 lm	1150 lm	1450 lm
Natural White	CRI 80	950 lm	1200 lm	950 lm	1200 lm
Warm White	CRI 80	825 lm	1050 lm	825 lm	1050 lm
	CRI 90	-	-	660 lm	840 lm

Chipsets		CREE XB-D	
Power Consumption		15W	
Beam Angle		50% 20° / 25° / 40° / 60° / 100°	
True White	CRI 70	1150 lm	
Natural White	CRI 80	950 lm	
Warm White	CRI 80	825 lm	

Chipsets		CREE XP-E	LUXEON Rebel
Power Consumption		15W	
Beam Angle		50% 15° / 60° / 100° 60° / 100°	
True White	CRI 80	950 lm	950 lm
Natural White	CRI 80	800 lm	800 lm
Warm White	CRI 80	700 lm	700 lm
	CRI 90	-	560 lm

Chipsets		EPISTAR	
Power Consumption		15W	
Beam Angle		50% 60° / 100°	
True White	CRI 98	620 lm	
Warm White	CRI 98	470 lm	

Chipsets		Lumileds - LUXEON Q	
Power Consumption		15W	20W
Beam Angle		50% 60° / 100°	
True White	CRI 80	1300 lm	1600 lm
Natural White	CRI 80	1150 lm	1400 lm
Warm White	CRI 80	950 lm	1200 lm


Chipsets		OSRAM Square	
Power Consumption		15W	20W
Beam Angle		50% 60° / 100°	
True White	CRI 70	1300 lm	1600 lm
Natural White	CRI 70	1150 lm	1500 lm
Warm White	CRI 80	1000 lm	1300 lm
	CRI 92	800 lm (2400K)	1040 lm (2400K)
		800 lm	1040 lm


Chipsets		LUXEON Tx	
Power Consumption		15W	20W
Beam Angle		50% 60° / 100°	
True White	CRI 70	1300 lm	1600 lm
Natural White	CRI 70	1150 lm	1500 lm
Warm White	CRI 80	1000 lm	1300 lm

Chipsets		CREE XP-L	
Power Consumption		15W	20W
Beam Angle		50° / 100°	
True White	CRI 65	1600 lm	1950 lm
Natural White	CRI 75	1450 lm	1750 lm
Warm White	CRI 80	1200 lm	1600 lm


※All Lamp Luminous Flux Data are indicated in max values


## Illuminance at Distance

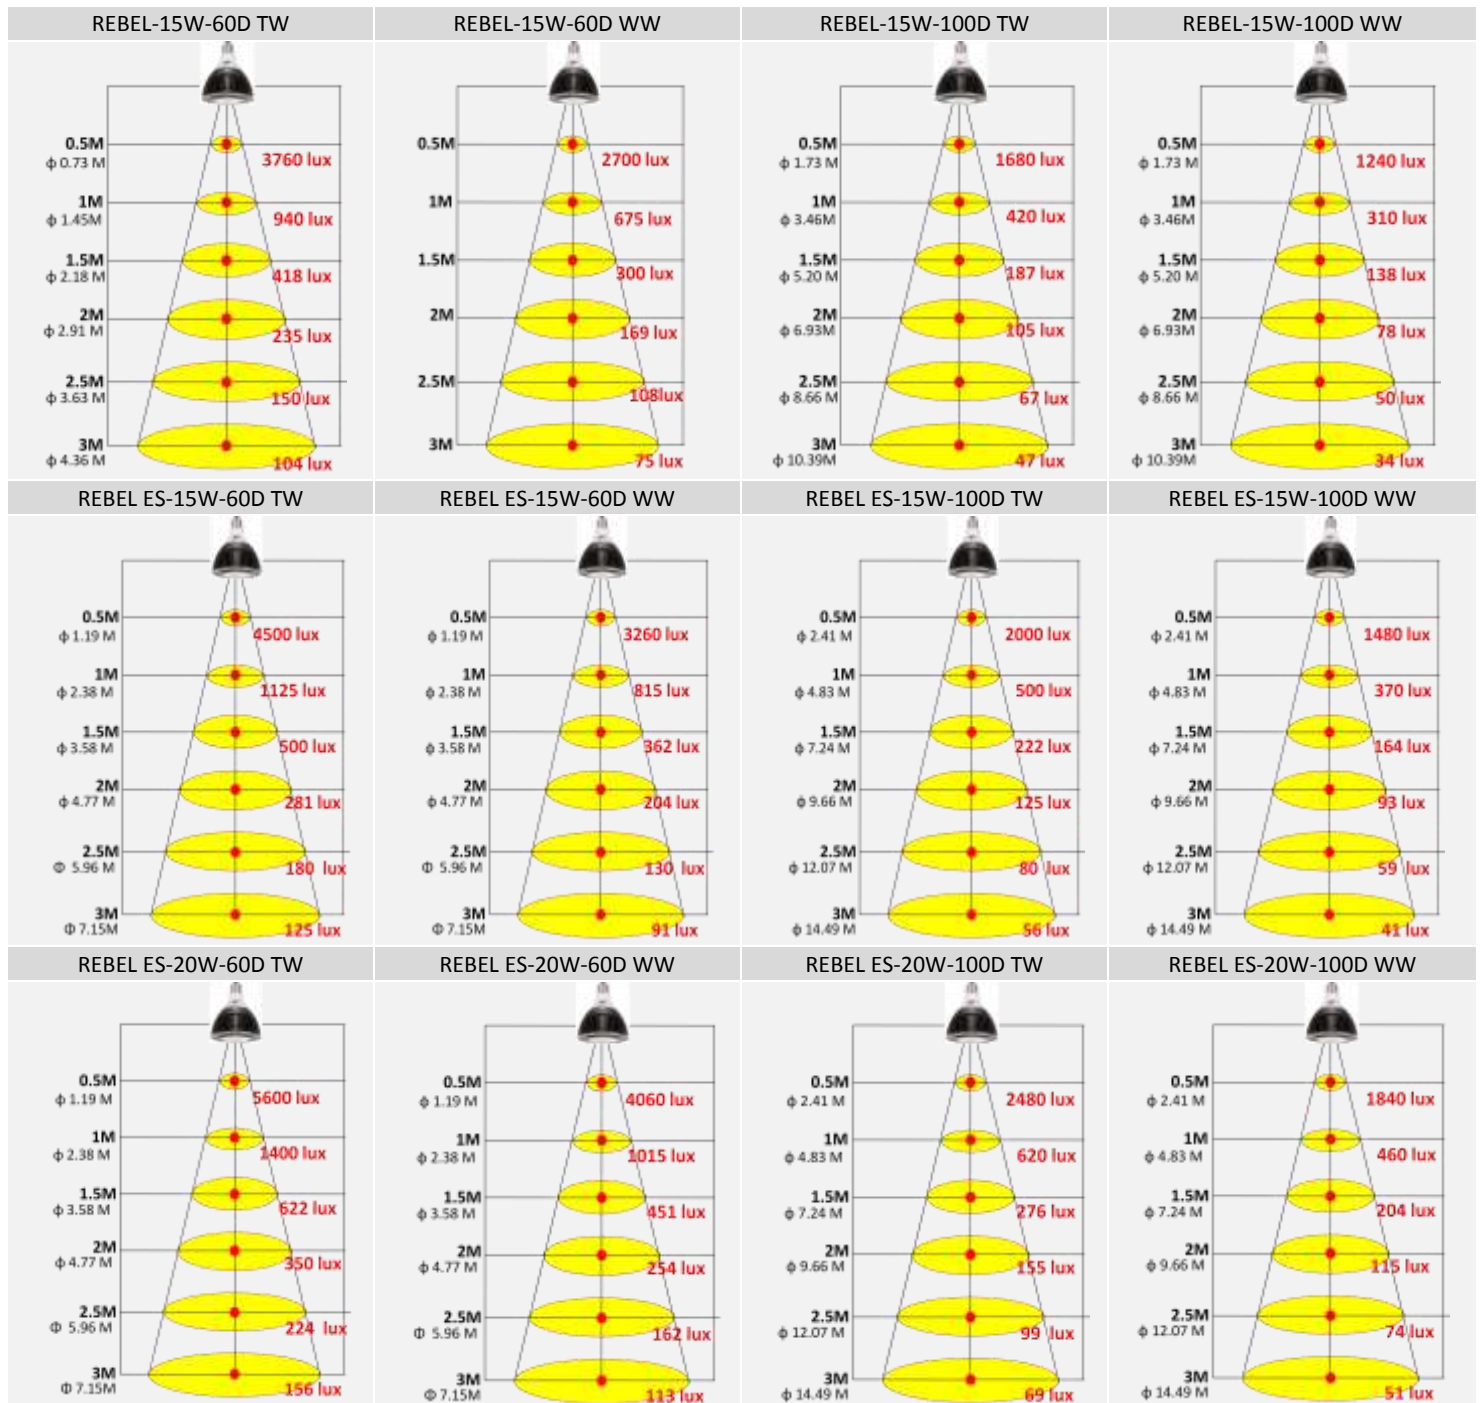

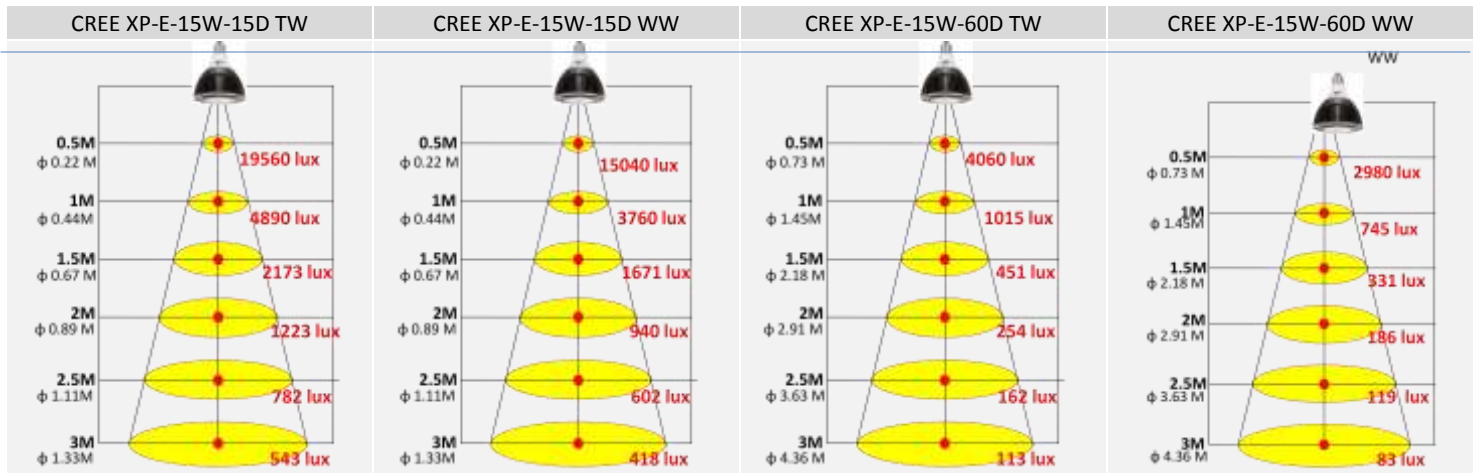



## Illuminance at Distance

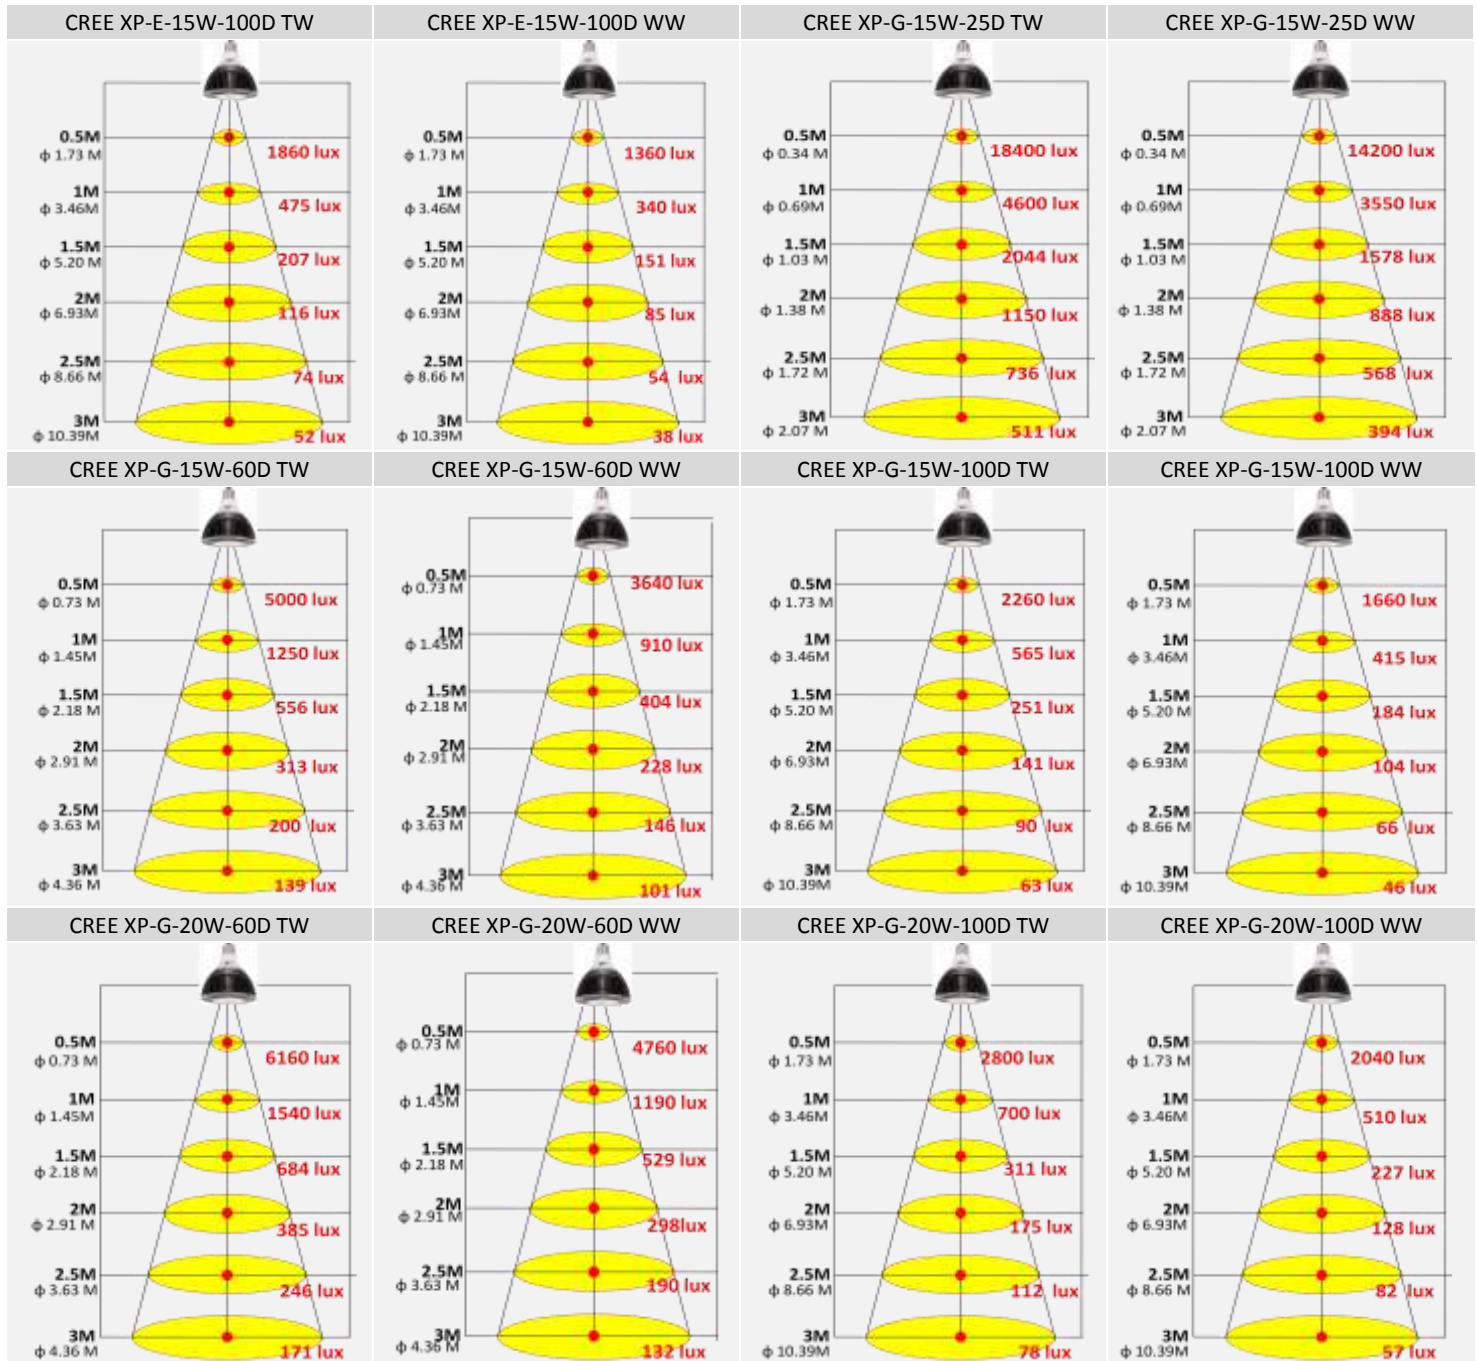

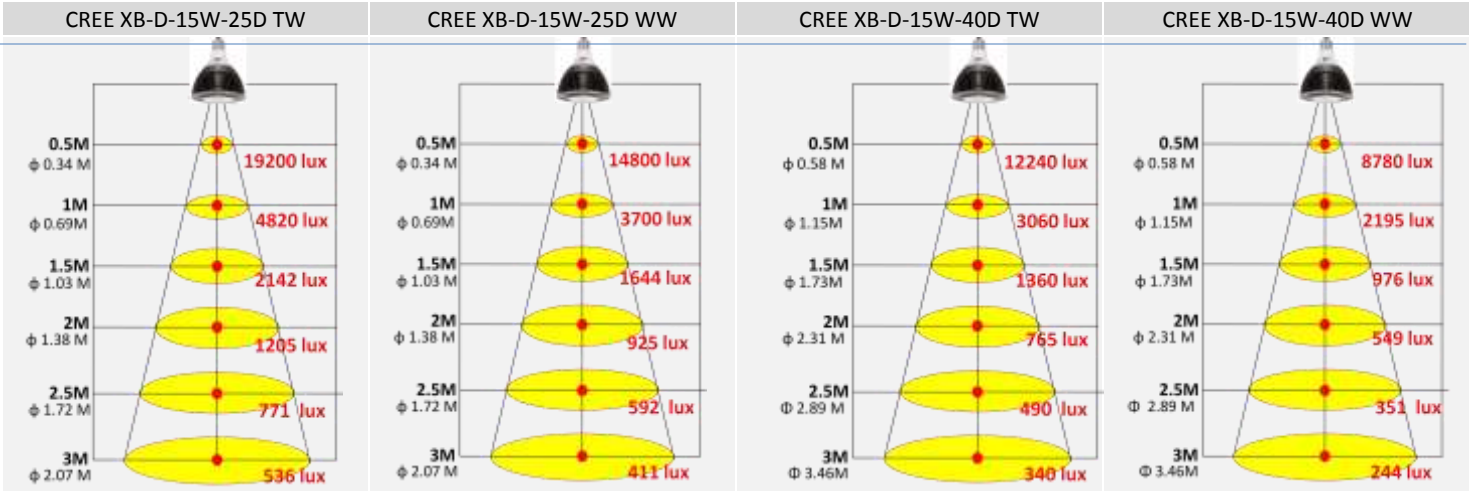

### Illuminance at Distance

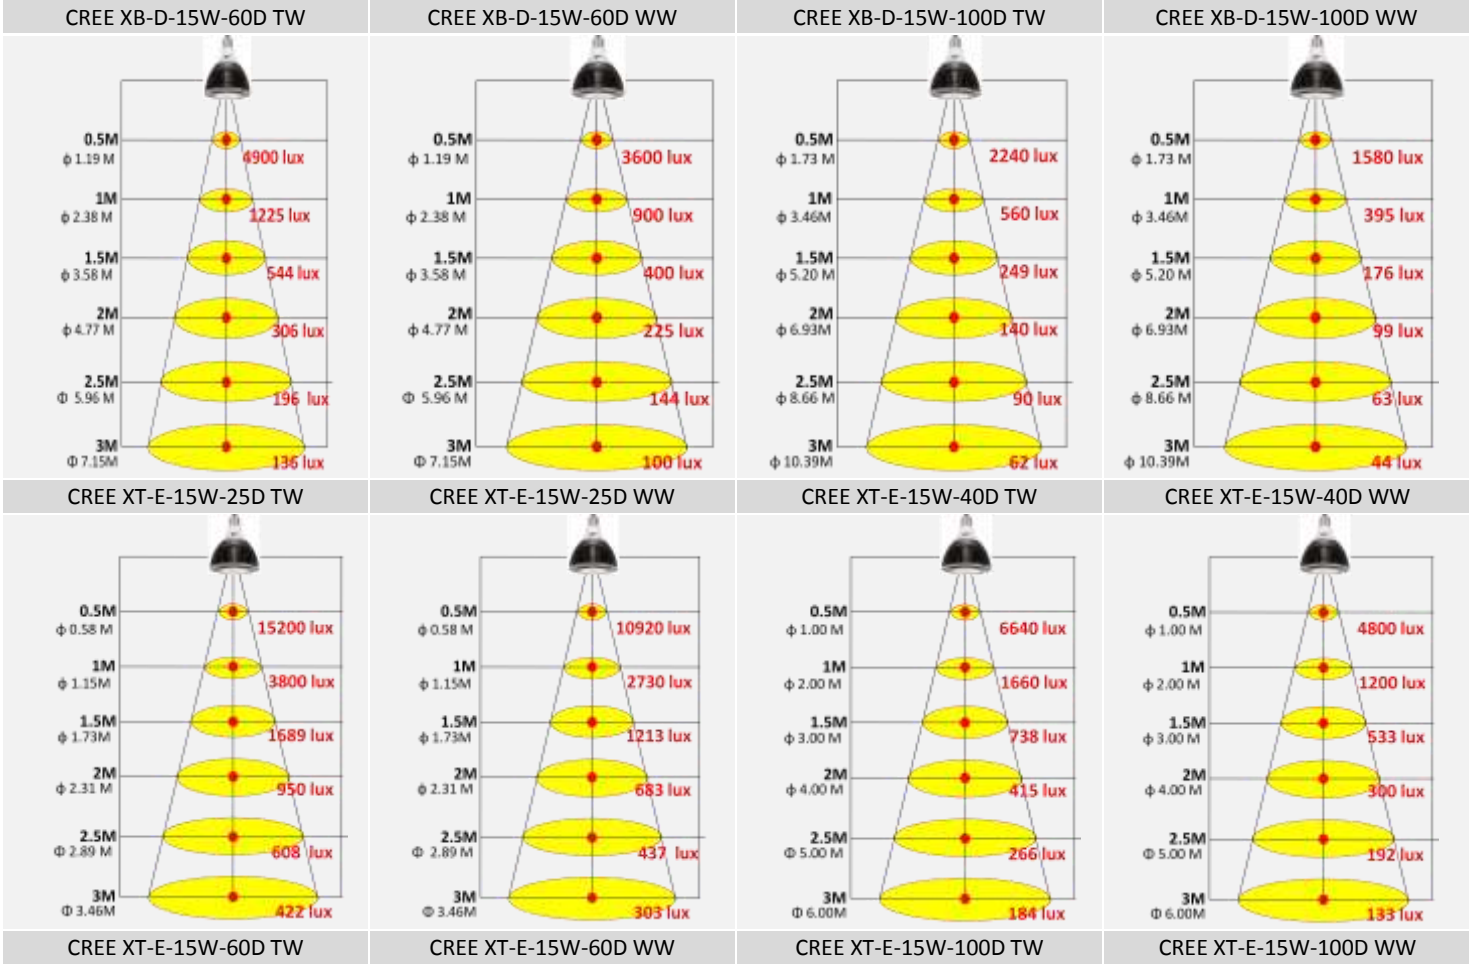

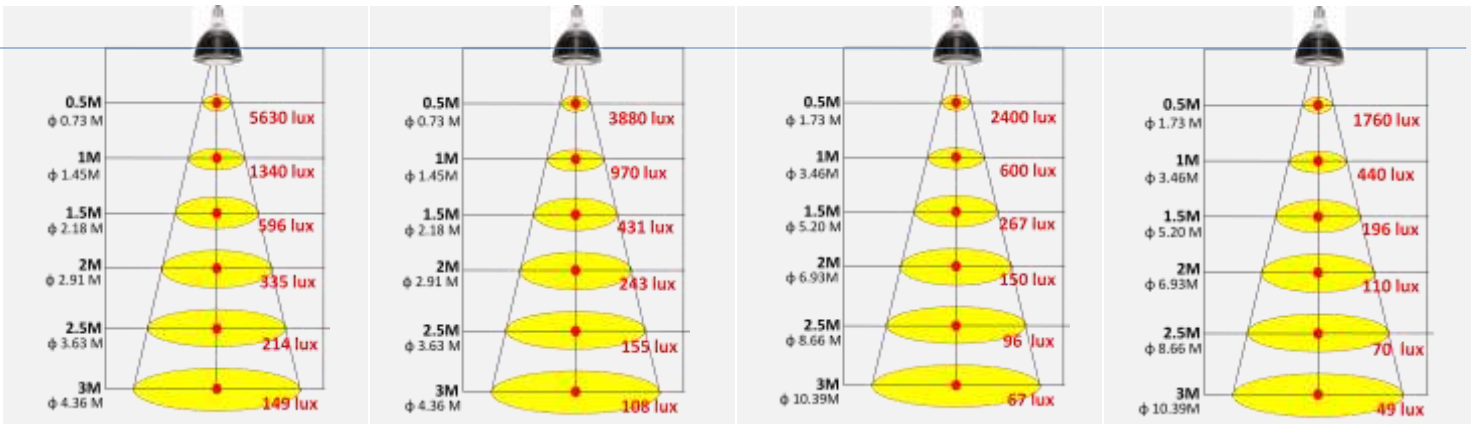


CREE XT-E-20W-60D TW

CREE XT-E-20W-60D WW

CREE XT-E-20W-100D TW

CREE XT-E-20W-100D WW

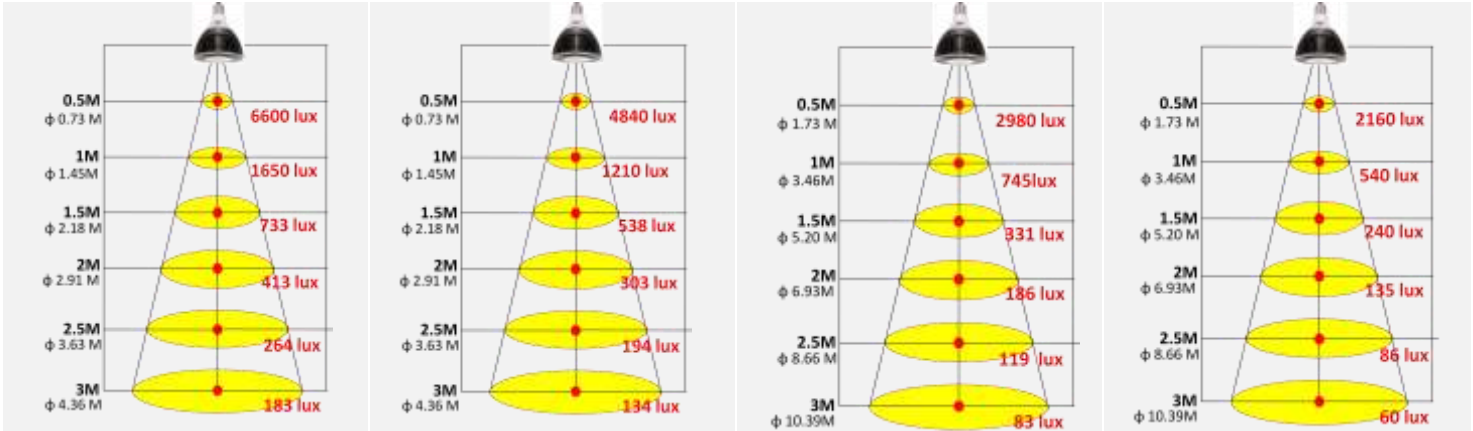


## Illuminance at Distance

CREE XT-E-15W-25D WW (2200K)

CREE XT-E-15W-40D WW (2200K)


CREE XT-E-15W-60D WW (2200K)

CREE XT-E-15W-100D WW(2200K)

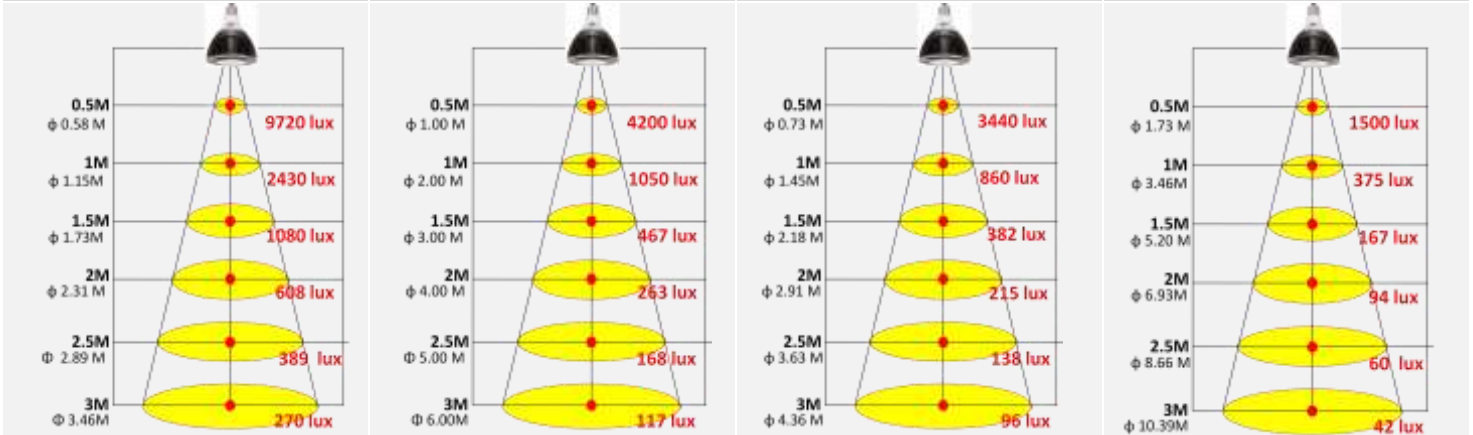

CREE XT-E-20W-60D WW (2200K)

CREE XT-E-20W-100D WW(2200K)

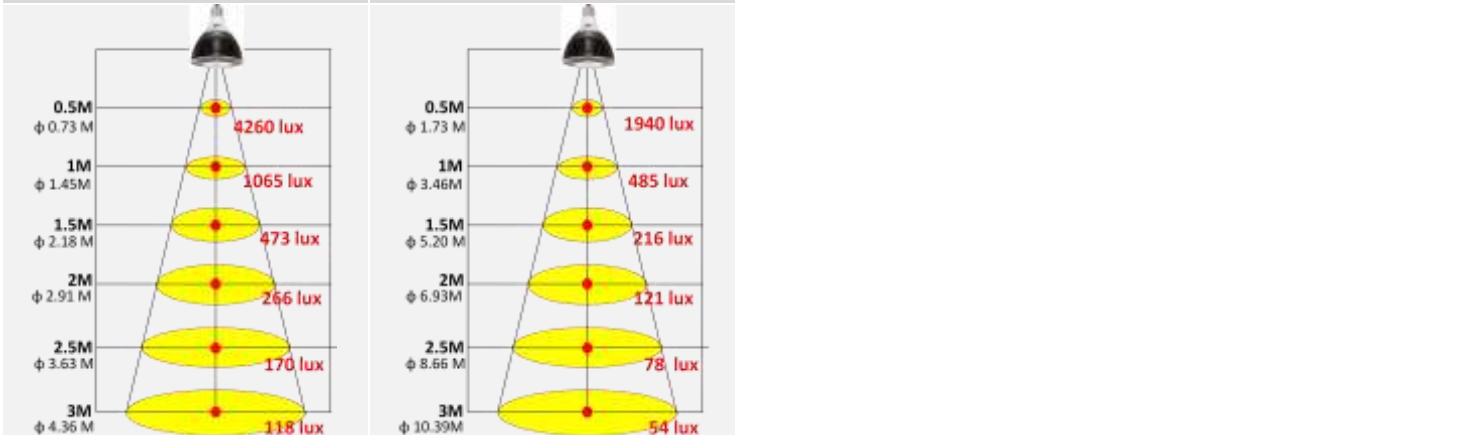

## Mechanical Dimensions

### P01


E26/27(EURO)

Beam Angle 15°, 20°, 25°, 40°, 100°



E26/27(EURO)

Beam Angle 60°



E26/24(US)

Beam Angle 15°, 20°, 25°, 40°, 100°



E26/24(US)

Beam Angle 60°



### P02

E26/27(EURO)

Beam Angle 15°, 20°, 25°, 40°, 100°



E26/27(EURO)

Beam Angle 60°



E26/24(US)

Beam Angle 15°, 20°, 25°, 40°, 100°



E26/24(US)

Beam Angle 60°





Copyright © Aeon Lighting Technology Inc. All rights reserved.  
ALT and ALTLED are either registered trademarks of Aeon Lighting Technology Inc. in Taiwan and/or other countries. All other brand or products names are trademarks or registered trademarks of their respective owners. Due to continuous improvement and innovations, specifications may change without notice.

Aeon Lighting Technology Inc.  
16F-8., No.2, Jian 8th Rd., Zhonghe Dist.,  
New Taipei City 235, Taiwan (R.O.C.)  
Tel +886-2-8226-1289  
Fax +886-2-8226-9066  
[www.aeonlighting.com](http://www.aeonlighting.com)

