

V7 MR16 Dimmable



ALTLED® Asteria Series

Specification Sheet

Internal Transformer

Product Introduction

ASTERIA is a minor planet that orbits the Sun, and also considered in the Greek Mythology as the Amazon that defeat the all mighty Heracles. ALT's ASTERIA can be presented as a strong, smart and efficient light bulb. ALT's Asteria MR16 series guarantees the outstanding efficiency and quality of High Power Products. All these make our MR16 products ideal for general business and decorative lighting purpose, including shop Lighting, Hotel lighting, and Commercial Applications. You can simply install it within the showcase of the boutique, and add up bonus for the display. Also, Asteria MR16 series can easily and smartly help you lessen energy consumption up to 90%, it will enhance your business profitability and help the environment to flourish. Asteria MR16 series certainly be the product to create a more beautiful and efficient world.

Certificates



Features

- ✓ Smooth dimming function fades from 100% to 0% light output without flicker.
- ✓ Elegant, rich and long-lasting lighting output ideal for Interior design.
- ✓ High density aluminum increase heat dissipation.
- ✓ Up to 90% energy saving compared to standard halogen lamp.

Application

- ✓ Shop Lighting
- ✓ Commercial Lighting
- ✓ Boutique Lighting
- ✓ Illumination Lighting
- ✓ Hotel Lighting



Specifications

Item	Specification	Details	
Output	Beam Angle	20°, 25°, 30°, 40°, 50°, 60°, 72°, 120°	
	Colour Range	TW / NW / WW	
	Lumen Maintenance	30,000+ hours	
Electrical	Input Voltage	110V AC or 220V AC	
	Power Consumption	7 Watts	
Physical	Bases	<ul style="list-style-type: none"> · E26 / 24 (US) · E26 / 27 (EURO) · GU10 · E11 · E12 · E14 · E17 · B22D · BA15D 	
	Weight	0.88 ~ 1.69 oz. (25 ~ 48 g)	
	Lens	Optics PMMA	
	Operating Temperature	-4° F to 104° F (-20°C to 40°C)	
	Humidity	0 – 95%, non-condensing	
	Certification and Safety	Certifications	RoHS , Laser Testing, PSE, UL, FCC, CE, C-tick, REACH
		Environment	Not for use in totally enclosed fixtures Suitable for damp location
Warranty		3 year	
Two Million Worldwide Product Liability Insurance.			

Lamp Luminous Flux

Chipsets		CREE XT-E
Power Consumption		7W
Beam Angle	50%	20° / 25° / 40° / 50° / 60° / 120°
True White	CRI 70	570 lm
Natural White	CRI 80	490 lm
Warm White	CRI 80	450 lm
	CRI 90	385 lm(2200k)
		360 lm

Chipsets		Lumileds – Luxeon Q
Power Consumption		7W
Beam Angle	50%	25° / 30° / 40° / 72°
True White	CRI 70	590 lm
Natural White	CRI 70	550 lm
Warm White	CRI 80	480 lm

Chipsets		CREE MHB
Power Consumption		7W
Beam Angle	50%	20° / 30° / 50° / 60° / 72° / 120°
True White	CRI 70	520 lm
	CRI 90	420 lm
Natural White	CRI 70	520 lm
	CRI 90	380 lm
Warm White	CRI 80	450 lm
	CRI 90	330 lm

※All Lamp Luminous Flux Data are indicated in max values

Optical Characteristics

Dominant Wavelength (nm) or Colour Temperature (K)


CREE LED Chips

Correlated Colour Temperature	Min.	Typ.	Max.
True White	4500K	6500K	10000K
Natural White	3500K	4100K	4500K
Warm White	2150K	3100K	3500K


LUXEON LED Chips

Correlated Colour Temperature	Min.	Typ.	Max.
True White	4500K	5650K	10000K
Natural White	3500K	4100K	4500K
Warm White	2540K	3100K	3500K

Illuminance at Distance

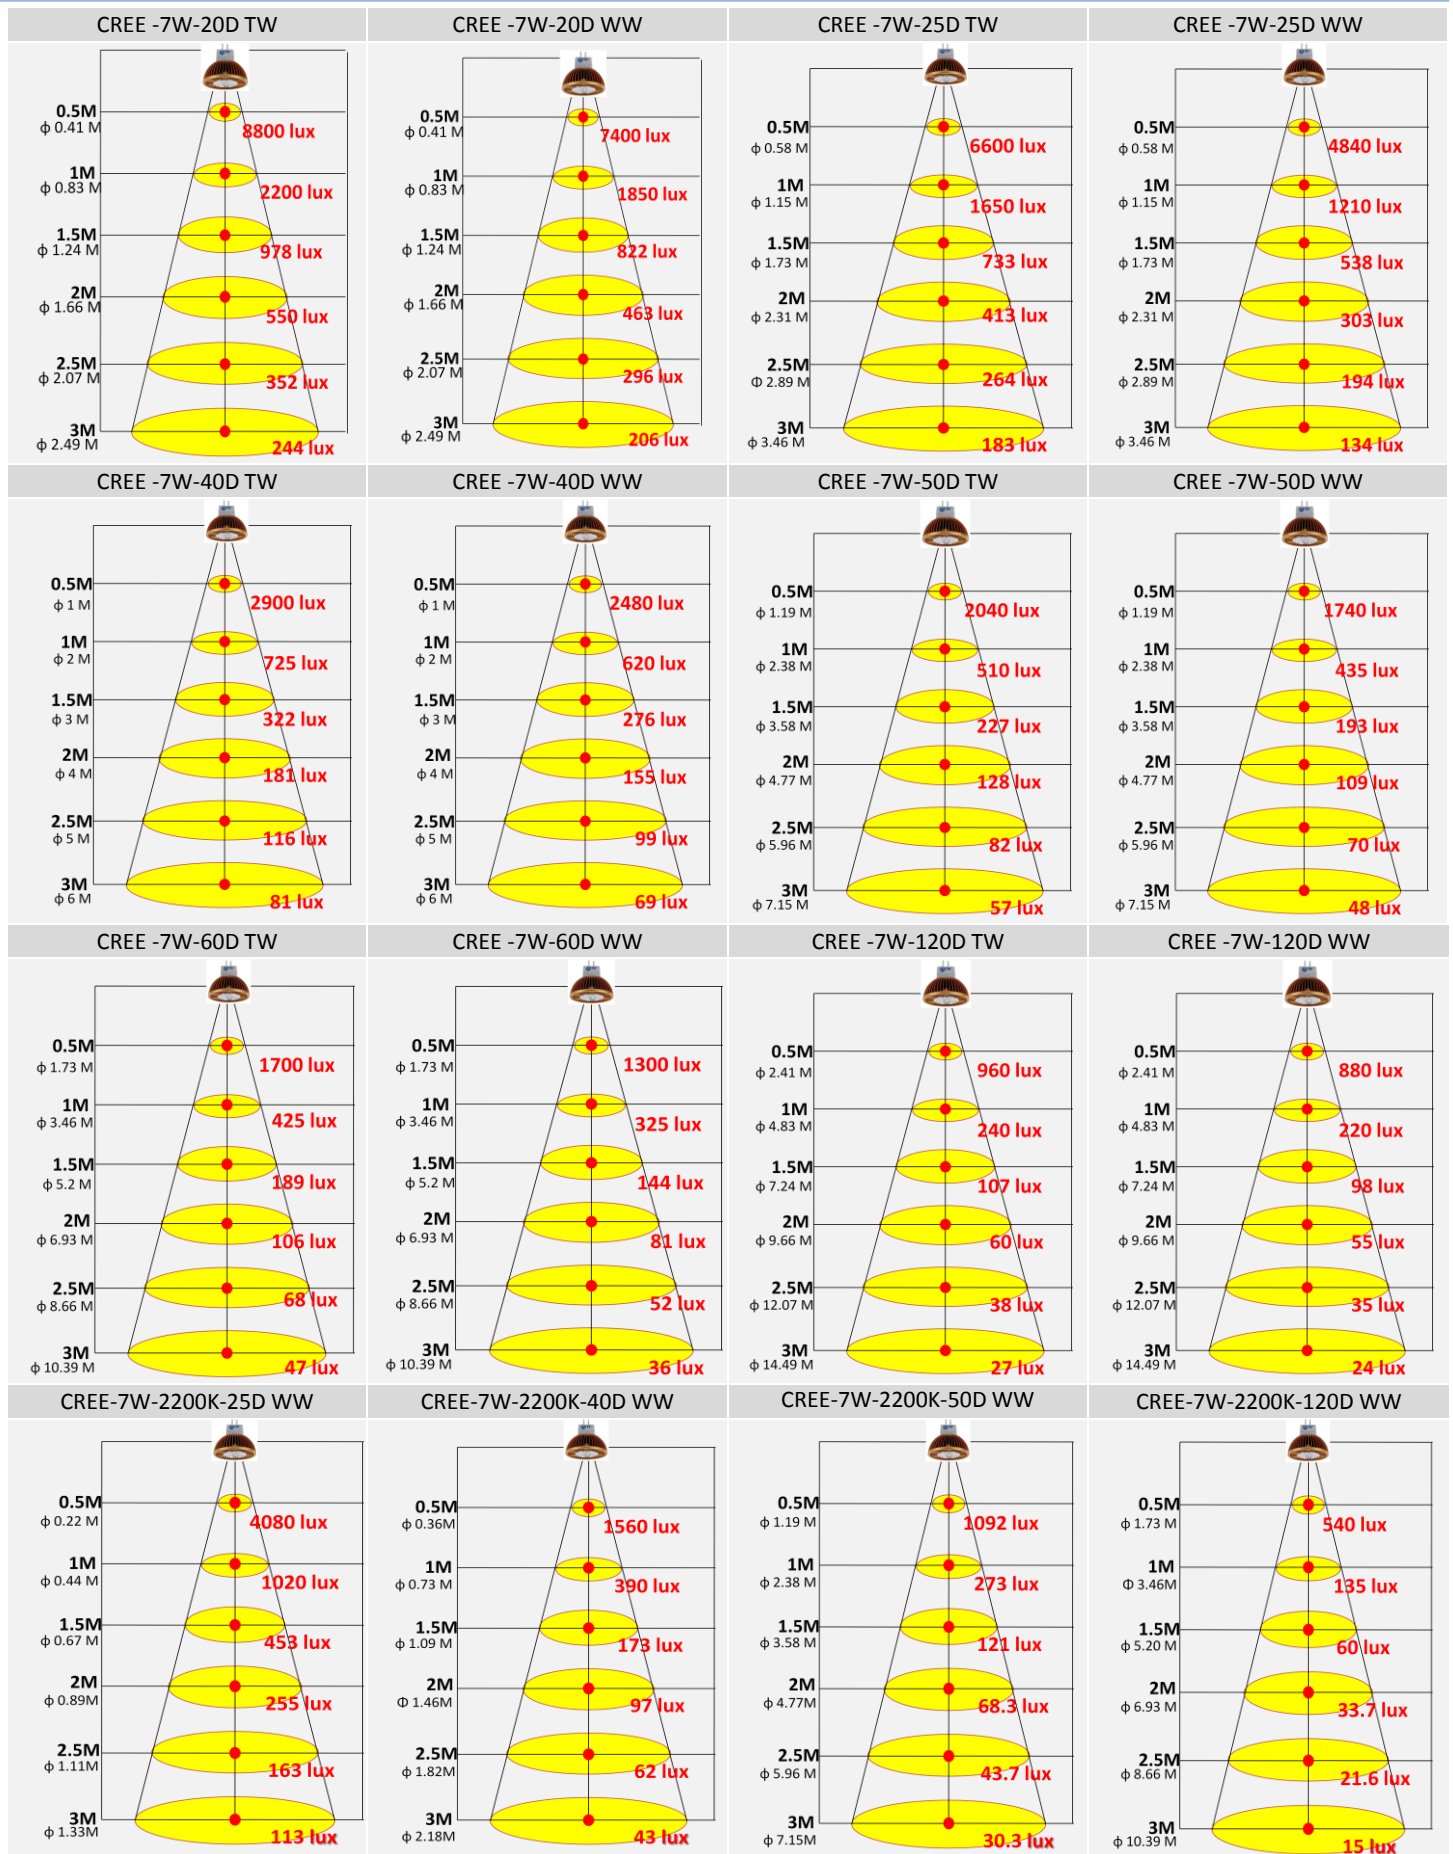

Mechanical Dimensions

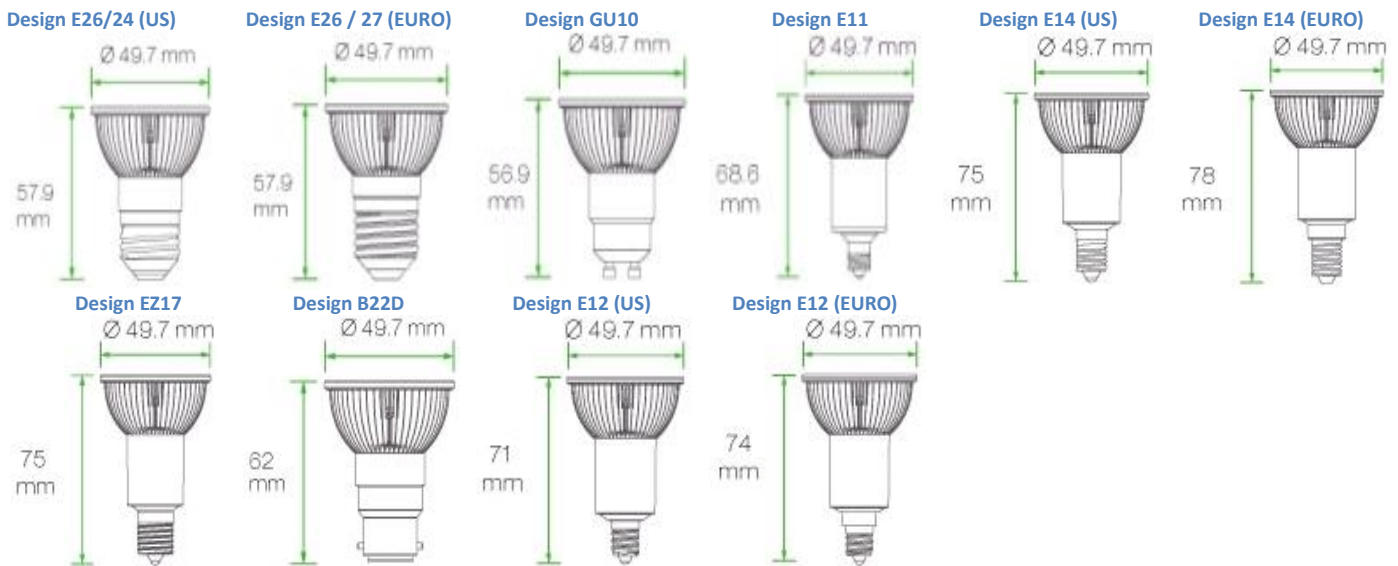

Compatible Dimmers List

Compatible Dimmers List		
100V~120V AC Types		
Brand	Type	Max. Watts
LUTRON	TGCL-153PH-LA	150W
LUTRON	CTCL-153PDH-WH	600W
LUTRON	DV-603PR-WH	600W
LEVITON	IPL06	600W
LEVITON	R60-6684-1IW	600W
Toshiba	DG9042SN	400W
Panasonic	WN575149	400W

Compatible Dimmers List		
220V~240V AC Types		
Brand	Type	Max. Watts
CLIPSAL	LEADING EDGE 32E450LM	450W