

V8 MR16 Dimmable



ALTLED® **Asteria** Series

Specification Sheet

Internal Transformer

Product Introduction

ASTERIA is a minor planet that orbits the Sun, and also considered in the Greek Mythology as the Amazon that defeat the all mighty Heracles. ALT's ASTERIA can be presented as a strong, smart and efficient light bulb. ALT's Asteria MR16 series guarantees the outstanding efficiency and quality of High Power Products. All these make our MR16 products ideal for general business and decorative lighting purpose, including shop Lighting, Hotel lighting, and Commercial Applications. You can simply install it within the showcase of the boutique, and add up bonus for the display. Also, Asteria MR16 series can easily and smartly help you lessen energy consumption up to 90%, it will enhance your business profitability and help the environment to flourish. Asteria MR16 series certainly be the product to create a more beautiful and efficient world.

Certificates



Features

- ✓ Elegant, rich and long-lasting lighting output ideal for Interior design.
- ✓ High density aluminum increase heat dissipation.
- ✓ Up to 90% energy saving compared to standard halogen lamp.

Application

- ✓ Shop Lighting
- ✓ Commercial Lighting
- ✓ Boutique Lighting
- ✓ Illumination Lighting
- ✓ Hotel Lighting



Specifications

Item	Specification	Details		
Output	Beam Angle	25°, 38°, 40°, 50°, 60°, 72°, 80°, 90°, 100°, 110°, 120°, 135°		
	Colour Range	TW / NW / WW		
	Lumen Maintenance	30,000+ hours		
Electrical	Input Voltage	110V AC or 220V AC		
	Power Consumption	7 Watts		
Physical	Bases	<ul style="list-style-type: none"> · E26 / 24 (US) · E26 / 27 (EURO) · GU10 / GZ 10 · E210 · E11 · E12 · E14 · E17 · B22D · BA15D · BA15S 		
		Weight	0.88 ~ 1.69 oz. (25 ~ 48 g)	
		Lens	Optics PMMA	
		Operating Temperature	-4° F to 104° F (-20°C to 40°C)	
		Humidity	0 – 95%, non-condensing	
		Certification and Safety	Certifications	RoHS , Laser Testing, PSE, UL, FCC, CE, C-tick, REACH
			Environment	Not for use in totally enclosed fixtures Suitable for damp location
			Warranty	3 years
Two Million Worldwide Product Liability Insurance.				

Chipset Luminous Flux

Chipsets		OSRAM Square
Power Consumption		7W
Beam Angle <small>10%</small>		40° / 60° / 80° / 100° / 135°
True White	CRI 70	870 lm
Natural White	CRI 70	870 lm
Warm White	CRI 80	670 lm
	CRI 92	520 lm(2400k) 530 lm

Chipsets		Lumileds – Luxeon Tx
Power Consumption		7W
Beam Angle <small>10%</small>		38° / 50° / 60° / 80° / 120°
True White	CRI 70	850 lm
Natural White	CRI 70	850 lm
Warm White	CRI 80	650 lm

Chipsets		CREE XP-L
Power Consumption		7W
Beam Angle <small>10%</small>		100° / 135°
True White	CRI 65	870 lm
Natural White	CRI 70	850 lm
Warm White	CRI 80	720 lm

Chipsets		CREE MHD
Power Consumption		7W
Beam Angle <small>10%</small>		72° / 80° / 100° / 135°
True White	CRI 70	765 lm
Natural White	CRI 70	765 lm
Warm White	CRI 80	660 lm

※All Chipset Luminous Flux Data are indicated in max values.

Optical Characteristics

Dominant Wavelength (nm) or Colour Temperature (K)

OSRAM LED Chips

Correlated Colour Temperature	Min.	Typ.	Max.
True White	5000K	6000K	7000K
Natural White	3500K	4000K	5000K
Warm White	2700K	3000K	3500K


LUXEON LED Chips

Correlated Colour Temperature	Min.	Typ.	Max.
True White	4500K	5650K	10000K
Natural White	3500K	4100K	4500K
Warm White	2540K	3100K	3500K


CREE LED Chips

Correlated Colour Temperature	Min.	Typ.	Max.
True White	4500K	6500K	10000K
Natural White	3500K	4100K	4500K
Warm White	2150K	3100K	3500K

Illuminance at Distance

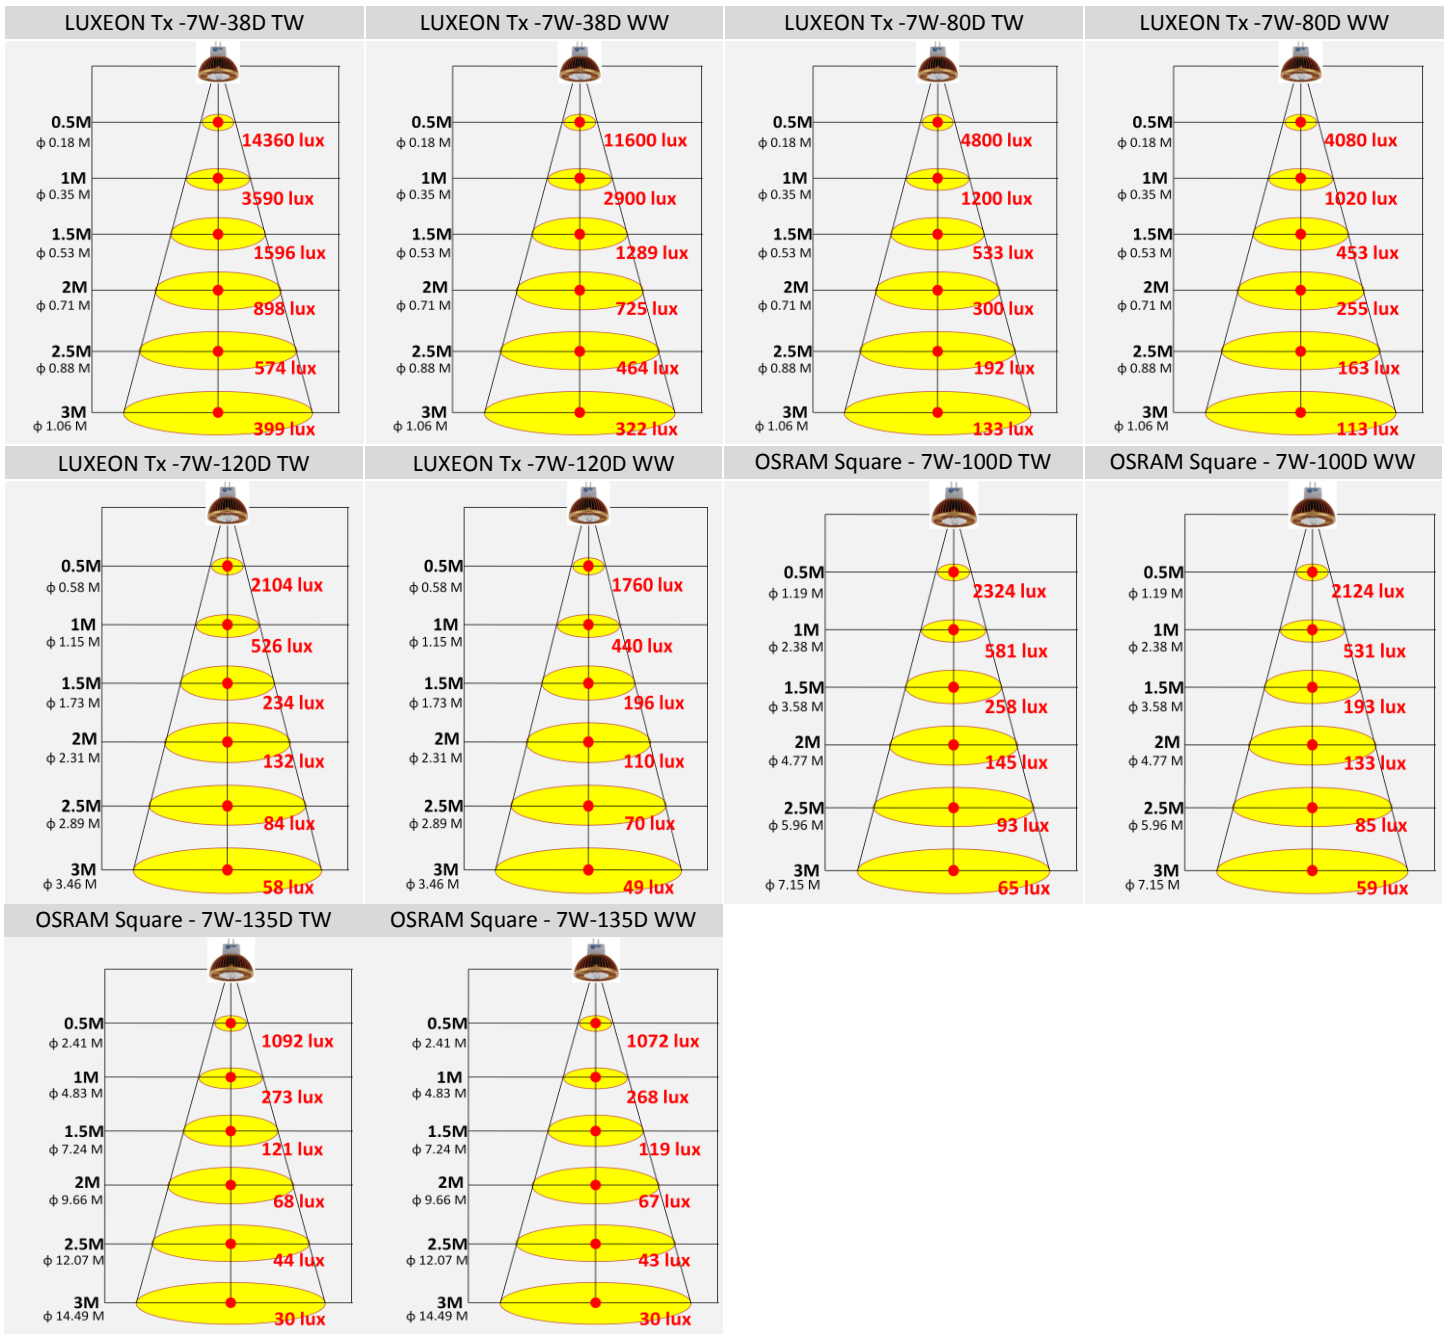

Mechanical Dimensions

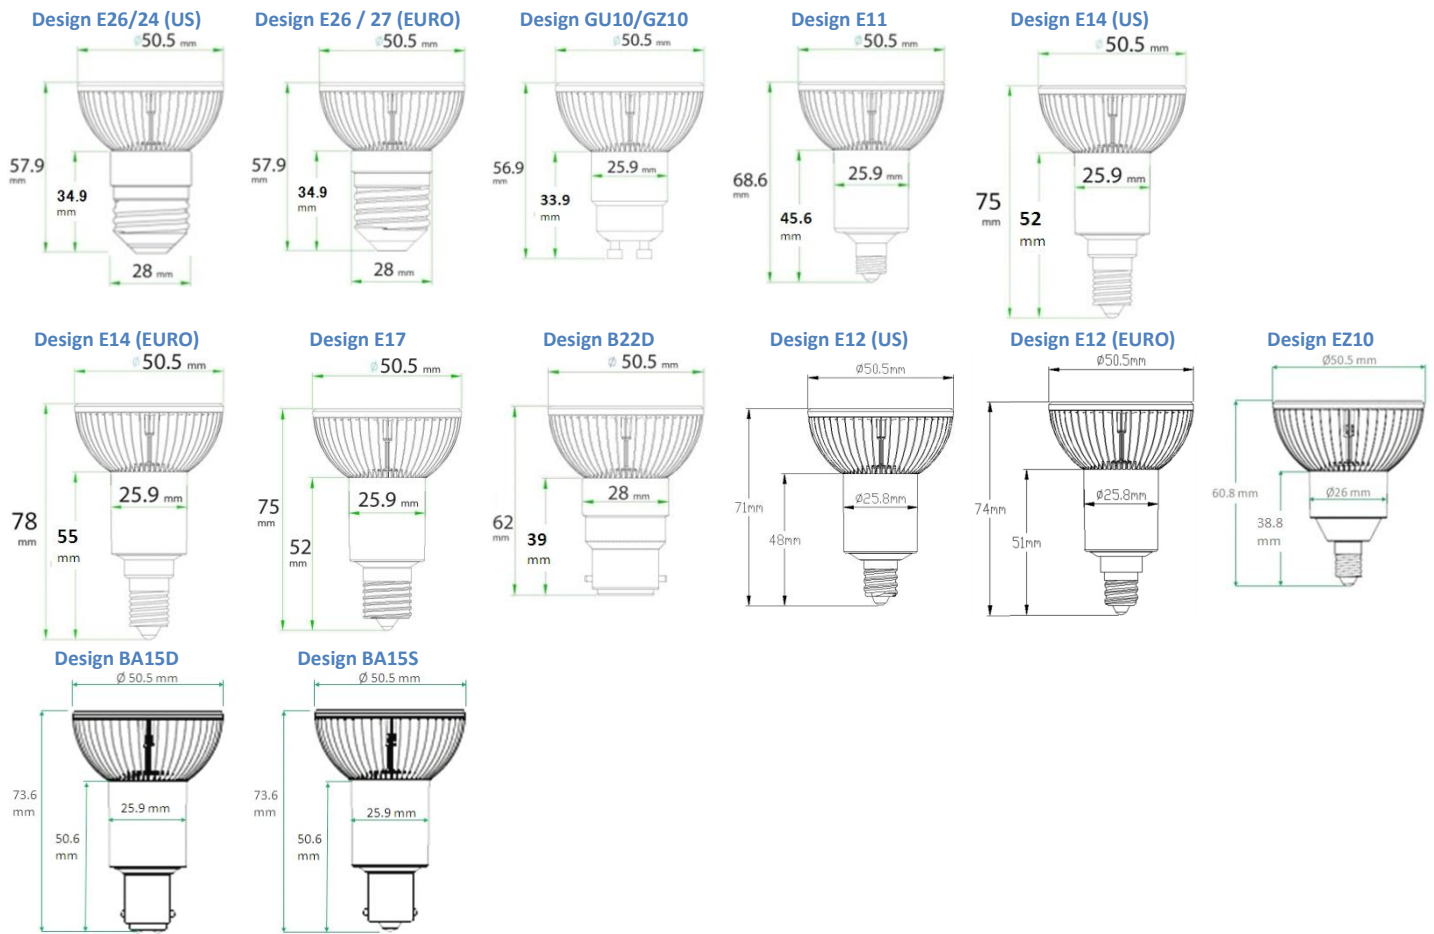

M01 Fixture



M02 Fixture

