

V4 MR16 Dimmable



# ALTLED® Asteria Series

## Specification Sheet

### Internal Transformer

## Product Introduction

ASTERIA is a minor planet that orbits the Sun, and also considered in the Greek Mythology as the Amazon that defeat the all mighty Heracles. ALT's ASTERIA can be presented as a strong, smart and efficient light bulb. ALT's Asteria MR16 series guarantees the outstanding efficiency and quality of High Power Products. All these make our MR16 products ideal for general business and decorative lighting purpose, including shop Lighting, Hotel lighting, and Commercial Applications. You can simply install it within the showcase of the boutique, and add up bonus for the display. Also, Asteria series MR16 Dimmable can easily and smartly help you lessen energy consumption up to 90%, it will enhance your business profitability and help the environment to flourish. Asteria MR16 series certainly be the product to create a more beautiful and efficient world.

## Certificates



## Features

- ✓ Smooth dimming function fades from 100% to 0% light output without flicker.
- ✓ Elegant, rich and long-lasting lighting output ideal for Interior design.
- ✓ High density aluminum increase heat dissipation.
- ✓ Up to 90% energy saving compared to standard halogen lamp.

## Application

- ✓ Shop Lighting
- ✓ Commercial Lighting
- ✓ Boutique Lighting
- ✓ Illumination Lighting
- ✓ Hotel Lighting



## Specifications

Item	Specification	Details		
Output	Beam Angle	10°, 15°, 25°, 30°, 60°, 100°		
	Colour Range	TW / NW / WW / R / G / B		
	Lumen Maintenance	30,000+ hours		
Electrical	Input Voltage	110V AC or 220V AC		
	Power Consumption	7 Watts		
Physical	Bases	<ul style="list-style-type: none"> <li>· E26 / 24 (US)</li> <li>· E26 / 27 (EURO)</li> <li>· GU10</li> <li>· E11</li> <li>· E12</li> <li>· E14</li> <li>· E17</li> <li>· B22D</li> <li>· BA15D</li> </ul>		
		Weight	0.88 ~ 1.69 oz. (25 ~ 48 g)	
		Lens	Optics PMMA	
		Operating Temperature	-4° F to 104° F (-20°C to 40°C)	
		Humidity	0 – 95%, non-condensing	
		Certification and Safety	Certifications	RoHS , Laser Testing
			Environment	Not for use in totally enclosed fixtures Suitable for damp location
			Warranty	3 year
		<b>Two Million Worldwide Product Liability Insurance.</b>		

## Lamp Luminous Flux

Chipsets	LUXEON Rebel		CREE XP-C
Power Consumption	7 W	7 W	7 W
LED Qty	4 pcs	2 pcs	4 pcs
CRI	80		
Beam Angle 50%	15° / 30°	25° / 60°	10°/100°
True White ○	360 lm	300 lm	355 lm
Natural White ●	360 lm	300 lm	330 lm
Warm White ●	275 lm CRI 90 220 lm	215 lm CRI 90 170 lm	270 lm
Red ●	130 lm	110 lm	-
Green ●	320 lm	270 lm	-
Blue ●	100 lm	90 lm	-

Chipsets	EPISTAR	
Power Consumption	7W	
CRI	98	
Beam Angle 50%	100° / 135°	
True White ○	290 lm	
Warm White ●	215 lm	


※All Lamp Luminous Flux Data are indicated in max values.

## Optical Characteristics

Dominant Wavelength (nm) or Colour Temperature (K)

Correlated Colour Temperature	Min.	Typ.	Max.
True White	4500K	6500K	10000K
Natural White	3500K	4100K	4500K
Warm White	2540K	3100K	3500K
Red	620.5nm	627nm	645nm
Green	520nm	530nm	550nm
Blue	460nm	470nm	490nm

# Illuminance at Distance

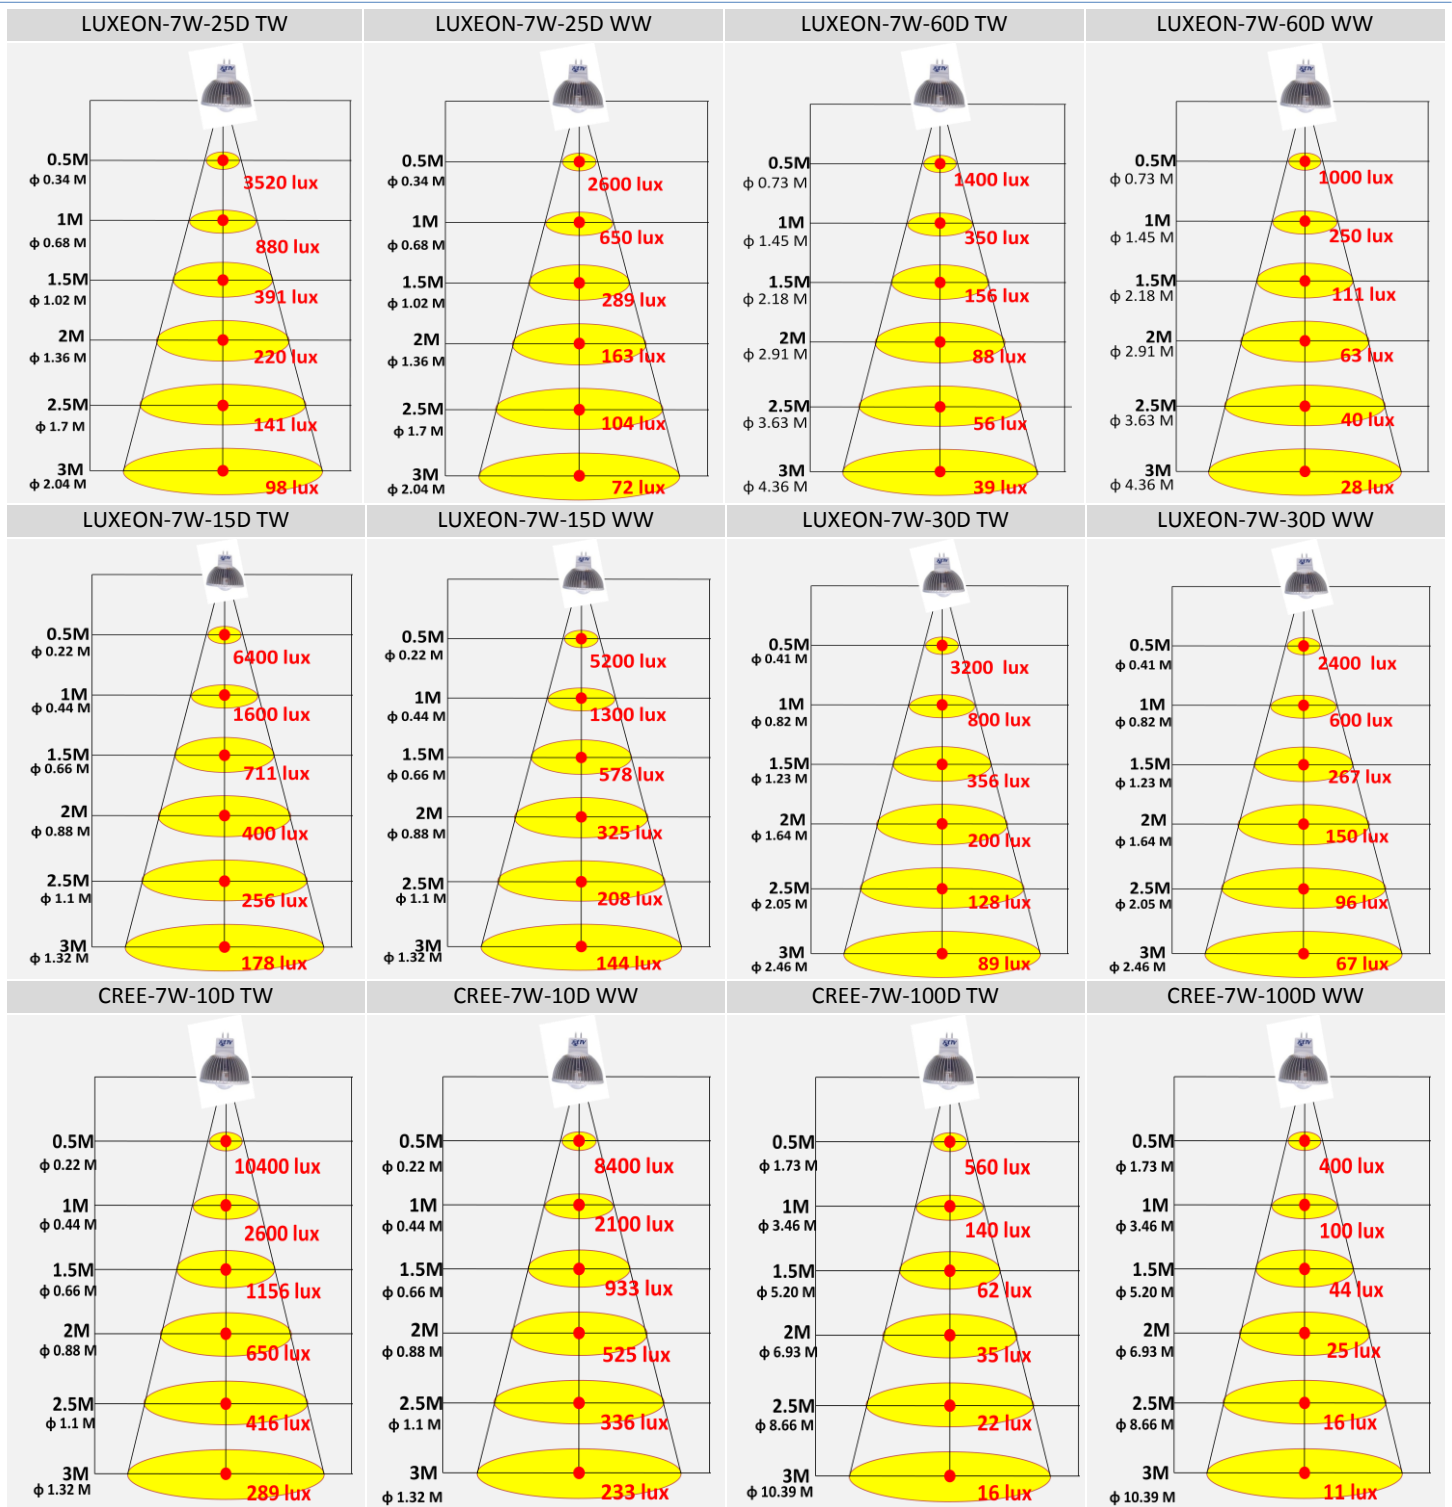

## Mechanical Dimensions



## Compatible Dimmers List

Compatible Dimmers List		
100V~120V AC Types		
Brand	Type	Max. Watts
LUTRON	TGCL-153PH-LA	150W
LUTRON	CTCL-153PDH-WH	600W
LUTRON	DV-603PR-WH	600W
LEVITON	IPL06	600W
LEVITON	R60-6684-1IW	600W
Toshiba	DG9042SN	400W
Panasonic	WN575149	400W

Compatible Dimmers List		
220V~240V AC Types		
Brand	Type	Max. Watts
CLIPSAL	LEADING EDGE 32E450LM	450W